

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number
WO 2005/008093 A1

(51) International Patent Classification⁷: **F16D 7/00, 9/00**

(21) International Application Number:

PCT/JP2004/010536

(22) International Filing Date: 16 July 2004 (16.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2003-276723 18 July 2003 (18.07.2003) JP

2004-083478 22 March 2004 (22.03.2004) JP

(71) Applicant (for all designated States except US): **CAL-SONIC KANSEI CORPORATION [JP/JP]**; 24-15, Minamidai 5-chome, Nakano-ku, Tokyo, 1648602 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **UMEMURA, Yukio [JP/JP]**.

(74) Agents: **MIYOSHI, Hidekazu et al.**; 9th Floor, Toranomon Daiichi Building, 2-3, Toranomon 1-chome, Minato-ku, Tokyo, 105001 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: **COUPLING MEMBER**

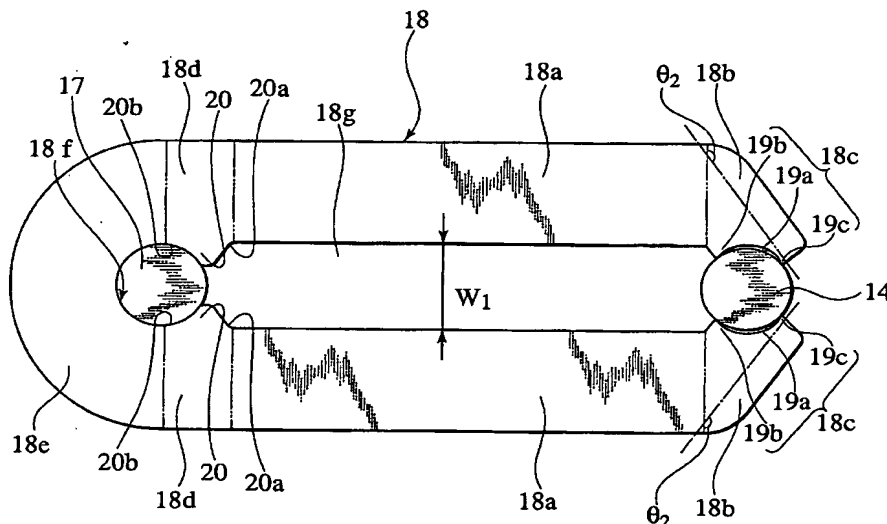

(57) **Abstract:** A coupling member (18) is of a forked leaf spring which is substantially U-shaped and has a pair of sidepiece portions (18a, 18a), a pair of bent portions (18b, 18b), a pair of joining portions (18d, 18d) and a curved portion (18e). The sidepiece portions (18a, 18a) are disposed parallel to each other. The bent portions (18b, 18b) are configured to extend from the sidepiece portions (18a, 18a) and have sandwich portions (18c, 18c) releasably supporting a first pin (14) mounted on a pulley, respectively. Each sandwich portion (18c) has an inside surface (19a) which is opposed to the outside circumferential surface of the first pin (14) at a regular distance, and a first and second projections (19b, 19c) which are provided at both ends of the inside surface (19a) and contacted with the outside circumferential surface of the first pin (14).